



# Topstek Current Transducer TA5A4V .. TA50A4V


## TA 5A~50A

### Features

- ◆ Highly reliable Hall Effect device
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 50 kHz)
- ◆ Low power consumption (9 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulate, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment e.g. electric trains
- ◆ Other automatic control systems

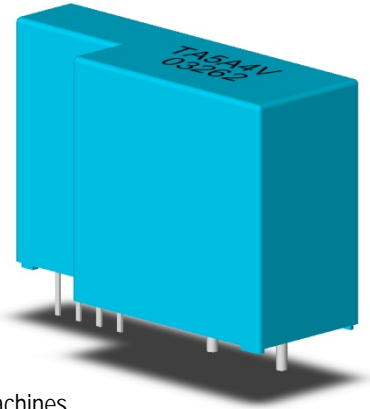

### Specifications



Parameter	Symbol	Unit	TA 5A 4V	TA 7.5A 4V	TA 10A 4V	TA 12.5A 4V	TA 15A 4V	TA 18.5A 4V	TA 20A 4V	TA 25A 4V	TA 37.5A 4V	TA 50A 4V
Nominal Input Current	$I_{in}$	A DC	5	7.5	10	12.5	15	18.5	20	25	37.5	50
Linear Range	$I_{ls}$	A DC	±15	±23	±30	±38	±45	±56	±60	±75	±112	±150
Diameter of Primary Coil	d	mm	1	1	1.2	1.4	1.4	1.4	1.4	1.6	1.6x2.5	1.6x2.5
Turns of Primary Coil	T	T	5	3	2	2	1	1	1	1	1	1
Ampere-Turn of Primary Coil	AT	AT	25	22.5	20	25	15	18.5	20	25	37.5	50
Nominal Output Voltage	$V_{hn}$	V	4 V ±1% at $I_f=I_{in}$ ( $R_L=10k\Omega$ )									
Offset Voltage	$V_{os}$	mV	Within ±40 mV @ $I_f=0$ , $T_a=25^\circ C$									
Output Resistance	$R_{OUT}$	$\Omega$	< 100 $\Omega$ (50 $\Omega$ nominal)									
Hysteresis Error	$V_{oh}$	mV	Within ±15 mV @ $I_f=I_{in} \rightarrow 0$									
Supply Voltage	$V_{CC}/V_{EE}$	V	±15V ±5%									
Linearity ( Within ± $I_{in}$ )	$\rho$	%	Within ±1% of $I_{in}$									
Consumption Current	$I_{CC}$	mA	±9 mA nominal									
Response Time (90% $V_{hn}$ )	$T_r$	$\mu sec$	13 $\mu sec$ max. @ $d I_f / dt = I_{in} / \mu sec$									
Thermal Drift of Output	-	%/ $^\circ C$	Within ±0.1 %/ $^\circ C$ @ $I_{in}$									
Thermal Drift of Zero Current Offset	-	mV/ $^\circ C$	Within ±3 mV/ $^\circ C$ @ $I_{in}$									
Dielectric Strength	-	V	AC2.5KV X 60 sec									
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$									
Operating Temperature	$T_a$	$^\circ C$	-15 $^\circ C$ to 80 $^\circ C$									
Storage Temperature	$T_s$	$^\circ C$	-20 $^\circ C$ to 85 $^\circ C$									
Mass	W	g	14 g									




# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for 5A to 25A models


All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted

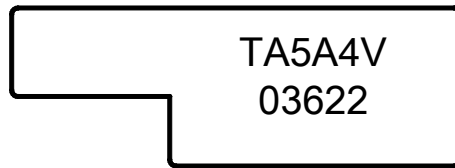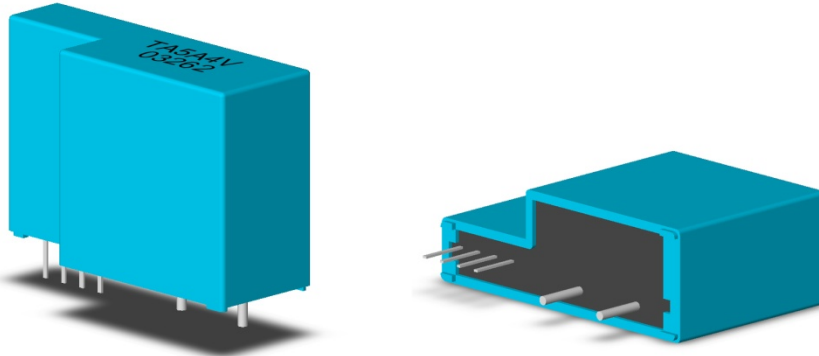

Model number and date code marking

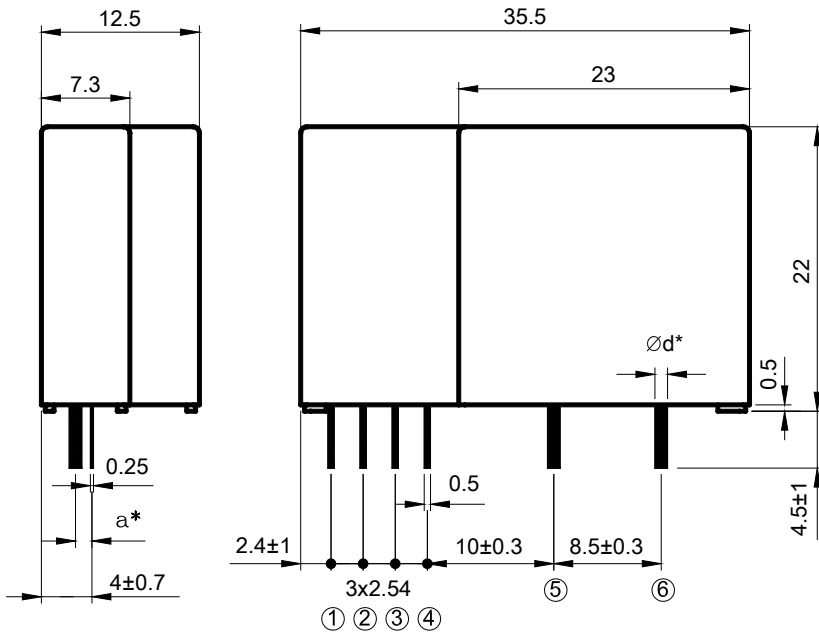

Pin Assignment	
①	+15V
②	-15V
③	V <sub>OUT</sub>
④	0V
⑤	I+
⑥	I-

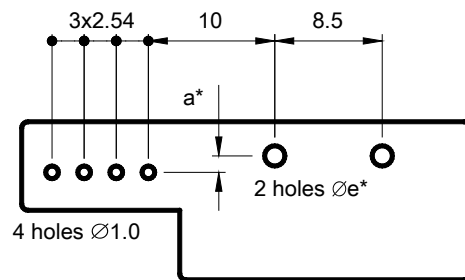

5A to 25A PCB mounting hole layout



Part Number	a* (mm)	d* (mm)	e* (mm)
TA5A4V	1.3	Ø1.0	Ø1.6
TA7.5A4V	1.3	Ø1.0	Ø1.6
TA10A4V	1.4	Ø1.2	Ø1.8
TA12.5A4V	1.5	Ø1.4	Ø2.0
TA15A4V	1.5	Ø1.4	Ø2.0
TA18.5A4V	1.5	Ø1.4	Ø2.0
TA20A4V	1.5	Ø1.4	Ø2.0
TA25A4V	1.6	Ø1.6	Ø2.2




# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for 37.5A to 50A models


All dimensions in mm  $\pm 0.5$ , holes  $-0, +0.2$  except otherwise noted

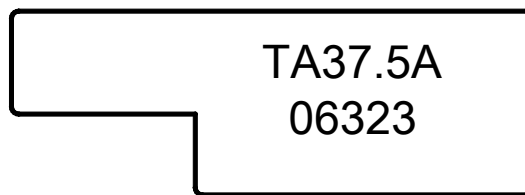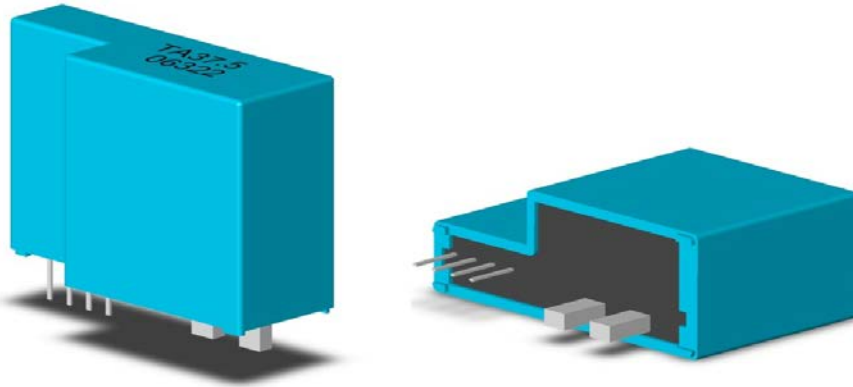

Model number and date code marking

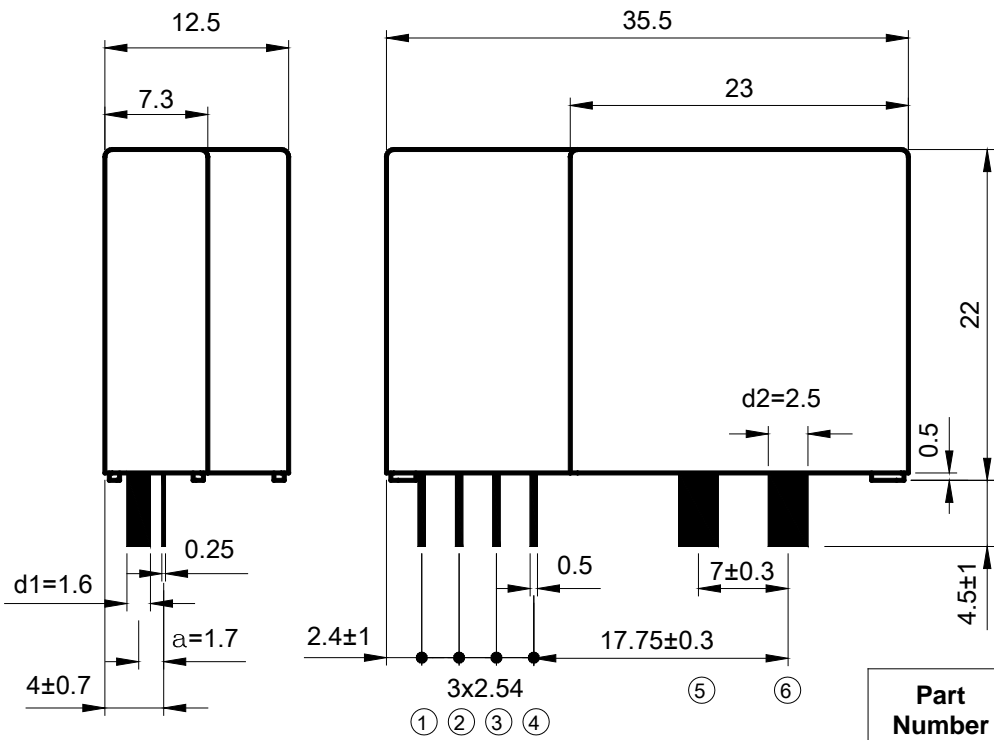

Pin Assignment	
①	+15V
②	-15V
③	V <sub>OUT</sub>
④	0V
⑤	I+
⑥	I-

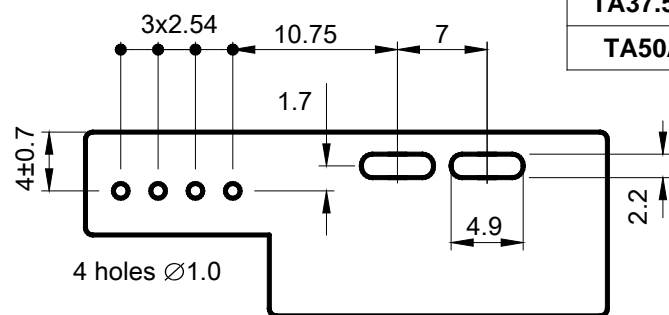

Part Number	a* (mm)	d1xd2 (mm)	hole (mm)
TA37.5A	1.7	□1.6x2.5	□2.2x4.9
TA50A	1.7	□1.6x2.5	□2.2x4.9

TA37.5A..TA50A PCB mounting hole layout








# Topstek Current Transducer TA5A4V .. TA50A4V

## Appearance, dimensions and pin identification for TA37.5A-P .. TA50A-P models


All dimensions in mm  $\pm 0.3$ , holes  $-0, +0.2$  except otherwise noted

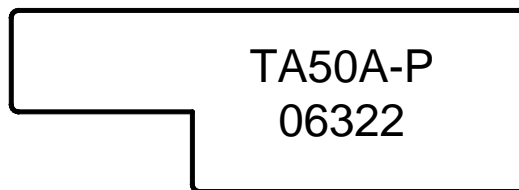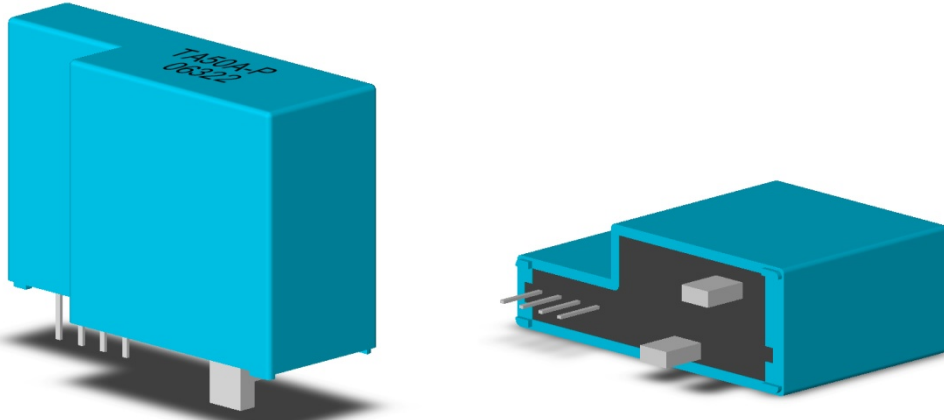

Model number and date code marking

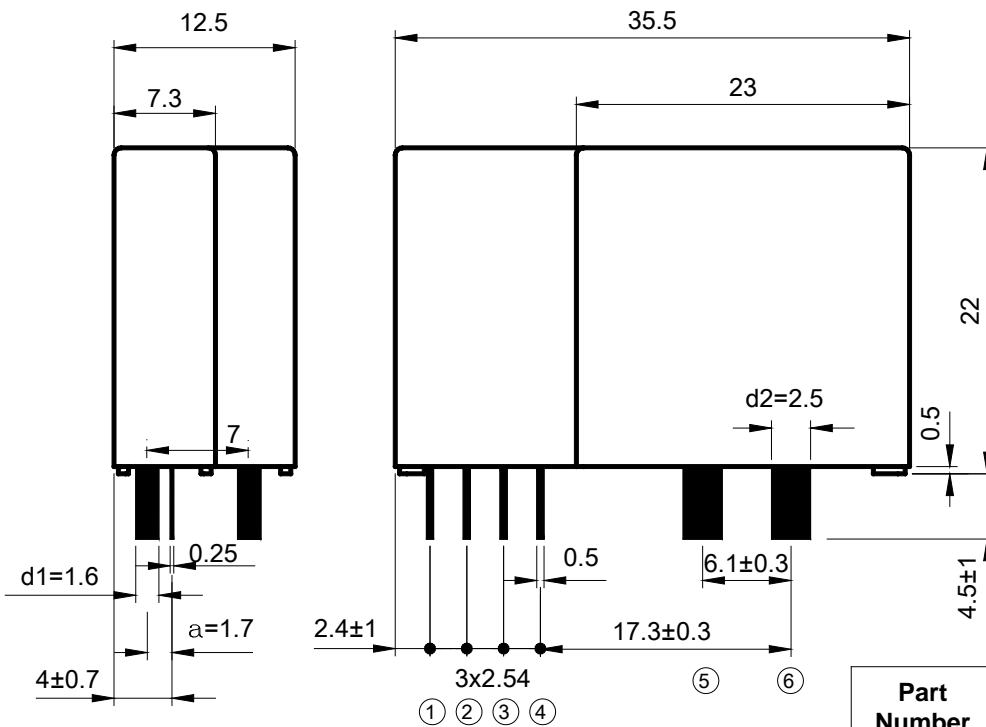

Pin Assignment	
①	+15V
②	-15V
③	V <sub>OUT</sub>
④	0V
⑤	I+
⑥	I-

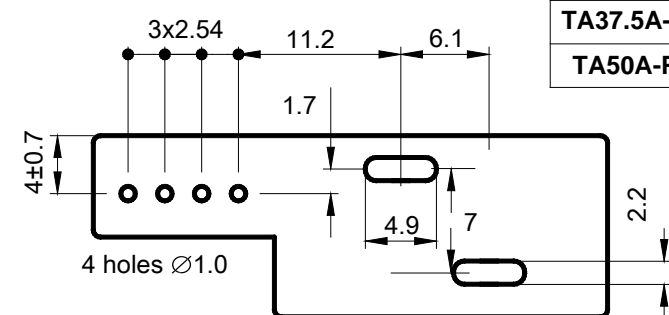

Part Number	a* (mm)	d1xd2 (mm)	hole (mm)
TA37.5A-P	1.7	□1.6x2.5	□2.2x4.9
TA50A-P	1.7	□1.6x2.5	□2.2x4.9

TA37.5A-P..TA50A-P PCB mounting hole layout





---

**Additional Information :**

**한국 대리점 : (주)디웰전자 (Diwell Electronics Co., Ltd.)**

**경기도 군포시 당정동 358 군포창업보육센터 202호**

**202, Kunpo Business Incubator Center, 358,**

**Dangjung-Dong, Gunpo-City, Gyeonggi-Do, South Korea**

**Phone : 070-8235-0820 (+82-70-8235-0820)**

**Fax : 031-429-0821 (+82-31-429-0821)**

**기술 및 구매 문의 email : [expoeb2@diwell.com](mailto:expoeb2@diwell.com),**

**[dsjeong@diwell.com](mailto:dsjeong@diwell.com)**