

Linear Current Sensor with differential outputs

Features:

- 14X10mm² current conductor through hole
- Output voltage proportional to AC and DC current
- Wide sensing current range 0~20 A at 5V volt
- High sensitive differential outputs
Single Ended, Sensitivity: 80mV/A
Differential output, Sensitivity: 160mV/A
- Wide operating voltage range 3.0~12 V
- Low operating current 3mA
- Isolation voltage 4000V
- Ratiometric output from supply voltage
- 23K Hz Bandwidth
- Two bronze sticks for easy soldering on PCB


**Functional Description :**

The Winson WCS2200 current sensor provides economical and precise solution for both DC and AC current sensing in industrial, commercial and communications systems. The unique package provides easy implementation without breaking original system and make current sensing possible. Typical applications include motor control, load detection and management, over-current fault detection and any intelligent power management system etc...

The WCS2200 consists of a precise, low-temperature drift linear hall sensor IC with temperature compensation circuit and a 14X10mm² through hole. Users can use system's own electric wire by pass it through this hole to measure passing current. This design allow system designers to monitor any current path without breaking or changing original system layout at all. Any current flowing through this hole will generate a magnetic field which is sensed by the integrated Hall IC and converted into a proportional voltage.

The terminals of the conductive path are electrically isolated from the sensor leads. This allow the WCS2200 current sensor to be used in applications requiring electrical isolation without the use of opto-isolators or other costly isolation techniques and make system more competitive in cost.


Winson reserves the right to make changes to improve reliability or manufacturability.

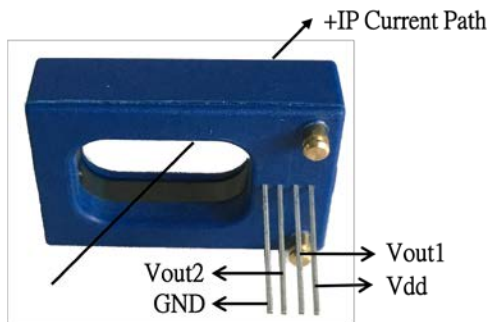

Absolute Maximum Range

Supply Voltage, Vdd	-----	14V
Pass Through Wire Channel	-----	14X10mm ²
Output Current Sink	-----	0.4mA
Output Current Source	-----	2mA
Basic Isolation Voltage	-----	4000V
Operating Temperature Range, Ta	-----	-20°C to +125°C
Storage Temperature Range, Ts	-----	-65°C to +150°C
Power Dissipation, Pd	-----	1W

Vout vs. Primary Current

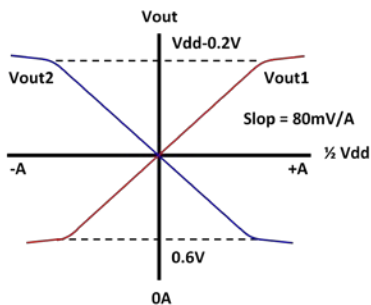


Order Information


(Vdd = 5V)

Part No.	Sensitivity	Current range
WCS2200	80 mV/A	DC: ±0 ~ 20A
		AC: rms 15A

Function Block:

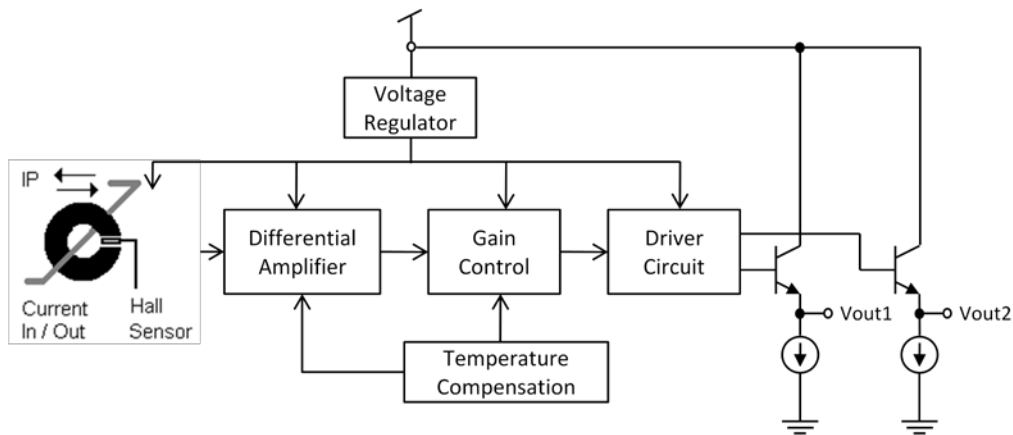

Functional Block Diagram

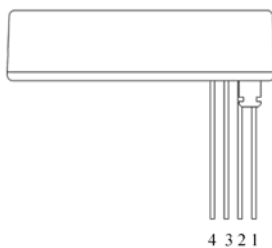

Number	Name	Description
1	Vdd	Power supply terminal
2	Vout1	Analog output signal 1
3	Vout2	Analog output signal 1
4	GND	Signal ground terminal

Winson reserves the right to make changes to improve reliability or manufacturability.





Electrical Characteristics: (T=+25°C, Vdd=5.0V)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Units
Supply Voltage	Vdd	—	3.0	—	12	V
Supply Current	Isupply	IP =0 A	—	3.5	6.0	mA
Zero Current Vout	V0G	IP =0 A(DC Mode)	2.3	2.5	2.7	V
Conductor Through Hole	—	—	—	14X10	—	mm ²
Sensitivity (Single Ended)	WCS2200	IP= +-10 A	68	80	92	mV/A
Sensitivity (Differential)	WCS2200	IP= +-10 A	136	160	184	mV/A
Bandwidth	BW	—	—	23	—	kHz
Measurable Current Range	WCS2200	Vdd=5V (DC Mode)	—	±20	—	A
		Vdd=5V (AC RMS)	—	15	—	
Temperature Drift	ΔVout	Ip =0 A	—	±1.0	—	mV/°C



1. All output-voltage measurements are made with a voltmeter having an input impedance of at least 100kΩ

2. Do not apply any 'resistor load' on output pin, it will degrade IC's performance


Characteristic Diagrams:

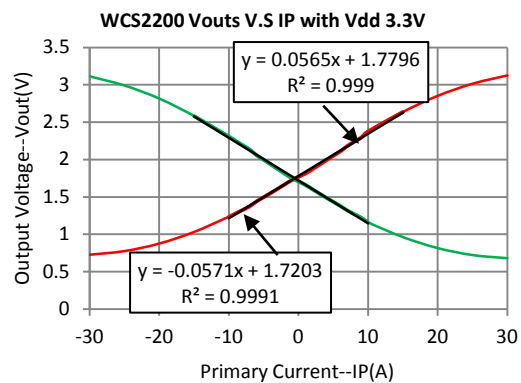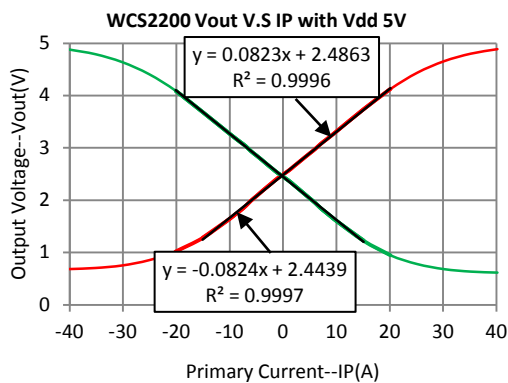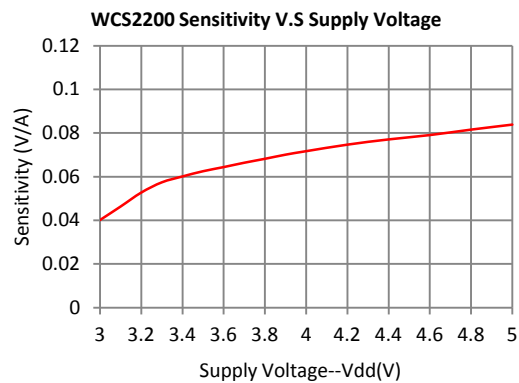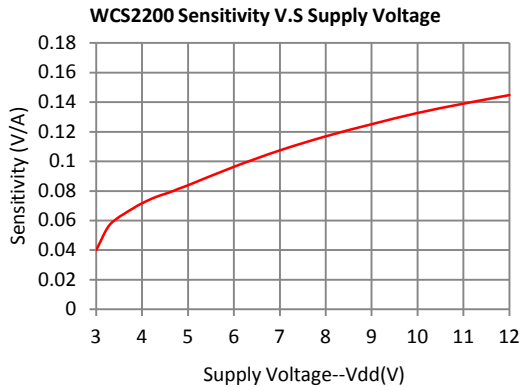


Winson reserves the right to make changes to improve reliability or manufacturability.

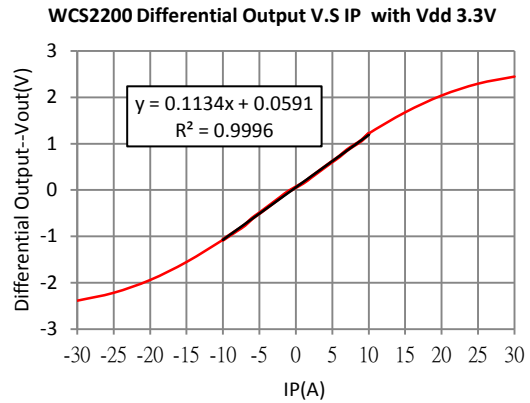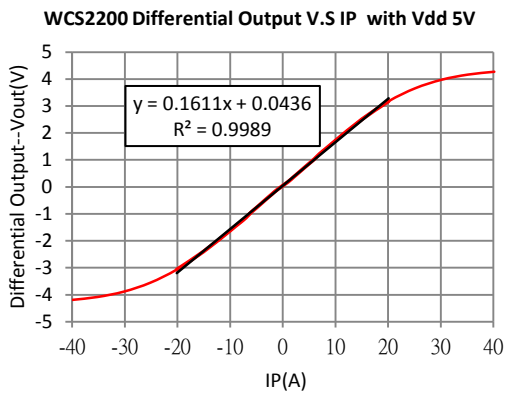

WCS2200 Sensitivity standardization of 30°C (5V) V.S Temperature

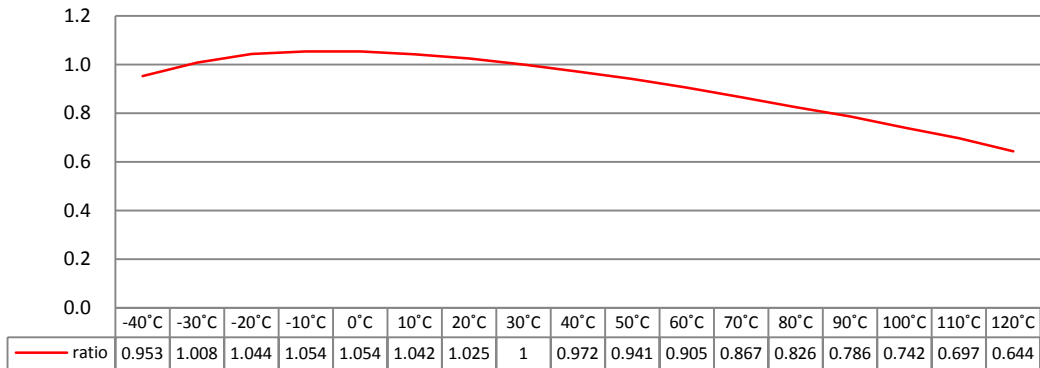


WCS2200 Sensitivity standardization of 30°C (3.3V) V.S Temperature

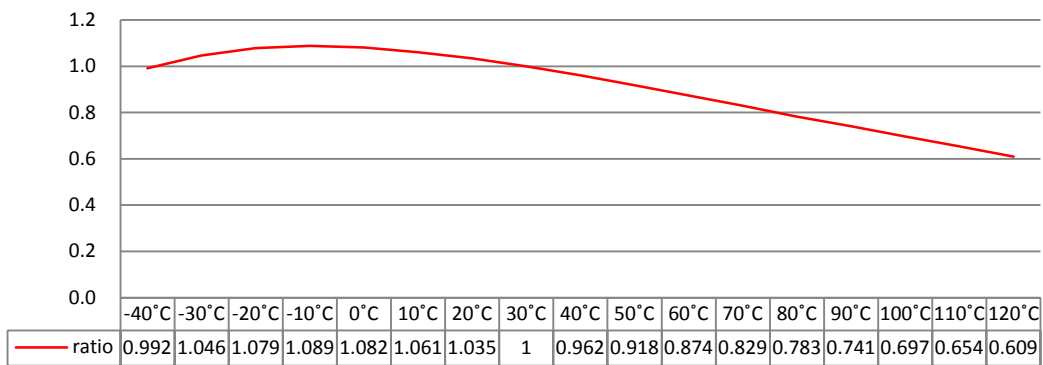

Winson reserves the right to make changes to improve reliability or manufacturability.

Package Information:(Unit : mm)

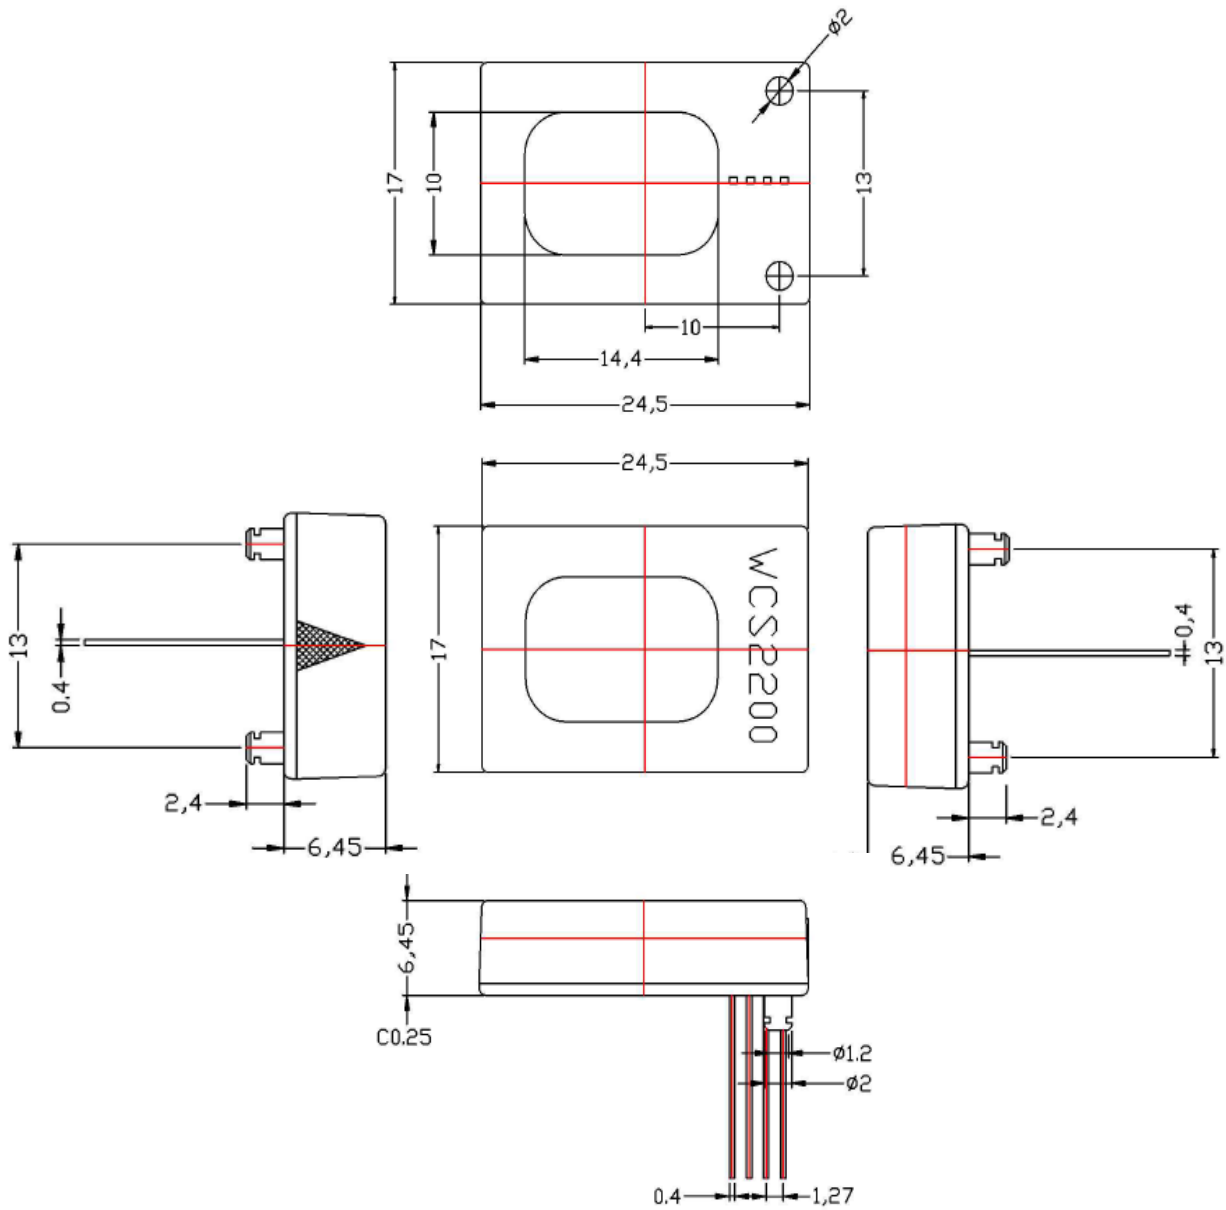

Winson reserves the right to make changes to improve reliability or manufacturability.